

SSZ-C-100



Serranda di sovrappressione da canale in alluminio passo 100 mm

Costruzione: Telaio in acciaio zincato. Alette in alluminio estruso.

Fissaggio: Mediante bulloni agli angoli delle flange

H (mm)	Prezzo €										
	Base (mm)										
	200	300	400	500	600	700	800	900	1000	1100	1200
210											
310											
410											
510											
610											
710											
810											
910											
1010											
1110											
1210											
1310											
1410											
1510											
1610											
1710											
1810											
1910											
2010											

H (mm)	Base (mm)											
	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400
210												
310												
410												
510												
610												
710												
810												
910												
1010												
1110												
1210												
1310												
1410												
1510												
1610												
1710												
1810												
1910												
2010												

BOCCHETTE•DIFFUSORI•GRIGLIE•SERRANDE

serrande di sovrappressione

DIAGRAMMA SCELTA RAPIDA / QUICK SELECTION DIAGRAM


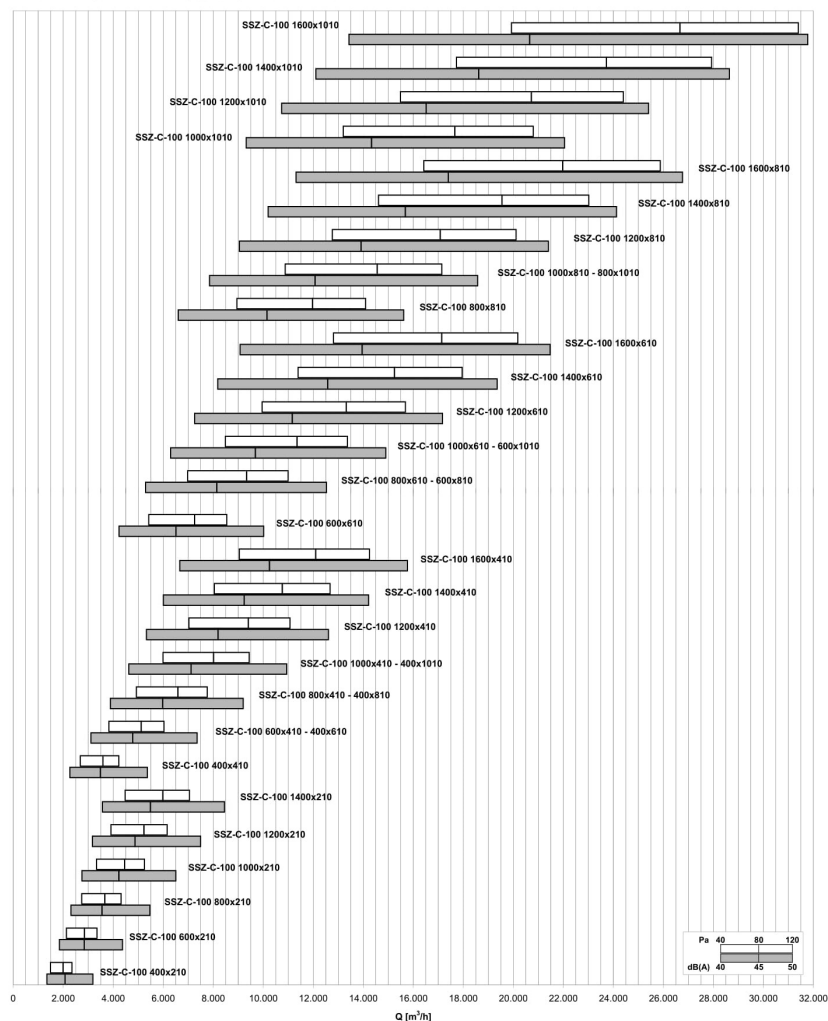



TABELLA DI SELEZIONE / SELECTION TABLE

Modello Model	A _v [m²]	v [m/s]		Q [m³/h]		Dp [Pa]		L _{max} [dB(A)]	
		min	max	min	max	min	max	min	max
SSZ-C-100 400x210	0,0840	4,9	7,8	1490	2350	40	120	41	46
SSZ-C-100 600x210	0,1260	4,7	7,4	2130	3360	40	120	42	47
SSZ-C-100 800x210	0,1680	4,5	7,1	2740	4320	40	120	42	47
SSZ-C-100 1000x210	0,2100	4,4	6,9	3330	5250	40	120	42	48
SSZ-C-100 1200x210	0,2520	4,3	6,8	3910	6160	40	120	42	48
SSZ-C-100 1400x210	0,2940	4,2	6,7	4480	7050	40	120	43	48
SSZ-C-100 400x410	0,1640	4,5	7,2	2680	4230	40	120	42	47
SSZ-C-100 600x410 - 400x610	0,2460	4,3	6,8	3830	6030	40	120	42	48
SSZ-C-100 800x410 - 400x810	0,3280	4,2	6,6	4930	7760	40	120	43	48
SSZ-C-100 1000x410 - 400x1010	0,4100	4,1	6,4	5990	9440	40	120	43	48
SSZ-C-100 1200x410	0,4920	4,0	6,3	7030	11070	40	120	43	48
SSZ-C-100 1400x410	0,5740	3,9	6,1	8040	12680	40	120	43	49
SSZ-C-100 1600x410	0,6560	3,8	6,0	9040	14250	40	120	44	49
SSZ-C-100 600x610	0,3660	4,1	6,5	5420	8550	40	120	43	48
SSZ-C-100 800x610 - 600x810	0,4880	4,0	6,3	6980	11000	40	120	43	48
SSZ-C-100 1000x610 - 600x1010	0,6100	3,9	6,1	8480	13370	40	120	43	49
SSZ-C-100 1200x610	0,7320	3,8	6,0	9950	15690	40	120	44	49
SSZ-C-100 1400x610	0,8540	3,7	5,8	11390	17960	40	120	44	49
SSZ-C-100 1600x610	0,9760	3,6	5,7	12810	20190	40	120	44	49
SSZ-C-100 800x810	0,6480	3,8	6,0	8950	14100	40	120	44	49
SSZ-C-100 1000x810 - 800x1010	0,8100	3,7	5,9	10880	17140	40	120	44	49
SSZ-C-100 1200x810	0,9720	3,6	5,7	12760	20110	40	120	44	49
SSZ-C-100 1400x810	1,1340	3,6	5,6	14610	23020	40	120	44	49
SSZ-C-100 1600x810	1,2960	3,5	5,5	16420	25880	40	120	44	50
SSZ-C-100 1000x1010	1,0100	3,6	5,7	13200	20800	40	120	44	49
SSZ-C-100 1200x1010	1,2120	3,6	5,6	15490	24400	40	120	44	50
SSZ-C-100 1400x1010	1,4140	3,5	5,5	17730	27930	40	120	44	50
SSZ-C-100 1600x1010	1,6160	3,4	5,4	19930	31400	40	120	45	50

DISEGNI / DRAWINGS

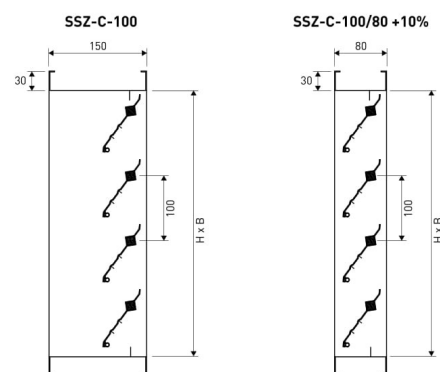

Alette coniugate su richiesta
Blade with conjugate operation on request



Battute di serie come da foto

Guarnizione continua antirumore